

# Viscoelastic or Viscoplastic Glucose Theory (VGT #98): Three Analyses using Three Different Tools of Time-Domain Statistical Correlation, Space-Domain VGT Energy, and Frequency-Domain Fast Fourier Transform Energy to Study the Body Weight Difference Between Wake-Up and Bed-Time (Weight Gain) Versus Food Portion % (Food) and Sleep Hours (Sleep) using a Type 2 Diabetes Patient Collected Data over the Past 5 Years from 6/15/2017 to 6/14/2022 Based on GH-Method: Math-Physical Medicine (No. 688)

Gerald C Hsu

EclaireMD Foundation, USA

**\*Corresponding author**

Gerald C. Hsu, EclaireMD Foundation, USA

**Submitted:** 15 Jun 2022; **Accepted:** 21 Jun 2022; **Published:** 12 Jul 2022

**Citation:** Gerald C Hsu .(2022). *Viscoelastic or Viscoplastic Glucose Theory (VGT #98): Three Analyses using Three Different Tools of Time-Domain Statistical Correlation, Space-Domain VGT Energy, and Frequency-Domain Fast Fourier Transform Energy to Study the Body Weight Difference Between Wake-Up and Bed-Time (Weight Gain) Versus Food Portion % (Food) and Sleep Hours (Sleep) using a Type 2 Diabetes Patient Collected Data over the Past 5 Years from 6/15/2017 to 6/14/2022 Based on GH-Method: Math-Physical Medicine (No. 688).* *J App Mat Sci & Engg Res*, 6(2), 01-09.

## Introduction

The purpose of this article is to investigate the close relationship of the output of body weight difference between wake-up time and bed-time (weight gain) versus two inputs, food consumption and meal portion % (food) and sleeping hours at night (sleep). The data used in this research are added to the author's collected annual data of these 3 categories.

These two inputs have gone through a "normalization process" by dividing the input values of both foods and sleep with the annual data of Y2022. In this way, he has assumed that his food portion (52% of his past normal amount) and sleep hours (~7 sleeping hours) in Y2022 are at the optimum levels for his healthcare targets and he intends to continue at this level of performance into future years. **Using this "normalization process", he can remove the dependency of the individual unit or certain unique characteristics associated with each viscosity factor.**

The author is an engineer who has conducted medical research work over the past 13 years in the fields of endocrinology, metabolic disorder-induced chronic diseases (especially diabetes), and their resulting various medical complications. Thus far, he has written nearly 700 papers and published more than 600 papers in various medical journals using math-physical medicine methodology (MPM).

Beginning with paper No. 578 dated 1/8/2022, he has written 93 medical papers and 4 economics papers using viscoelasticity and viscoplasticity theories (VGT) tools from physics and engineering disciplines. These papers aim to explore some hidden phys-

ical behaviors and provide a deeper quantitative understanding of the inter-relationships of a selected output (symptom) versus singular input or multiple inputs (root causes, risk factors, or influential factors).

*In the field of medical research, the hidden biophysical behaviors and possible inter-relationships exist among lifestyle details, medical conditions, chronic diseases, and certain medical complications, such as heart attacks, stroke, kidney failure, cancers, dementia, and even longevity concerns. He has noticed that most medical subjects with their associated data, multiple symptoms, and influential factors are "time-dependent" which means that all biomedical variables change from time to time because body living cells are organic and dynamically changing. This is what Professor Norman Jones, the author's adviser at MIT, suggested to him in December of 2021 and why he utilizes the VGT tools from physics and engineering to conduct his medical research work since then.*

Papers No. 671 through No. 674 were focused on the input of COVID infectious disease versus three key US economic outputs, GDP, Inflation, and CPI. From these 4 economics exercises, he further realized that *the established theory of viscoelasticity and viscoplasticity (from engineering and physics) should not only be limited to the scope of engineering applications. Its ability to link certain time-dependent variables and their physical characteristics and associated energy estimation via the hysteresis loop area are equally powerful for applications in many other research fields, such as economics, psychology, social science, and medicine. Of course, one of the major challenges of VGT analysis is always related to data mining, selection, and preparation.*

Paper No. 688 discusses his inter-relationship findings regarding his body weight gain versus both food portion and sleep hours. After having a sound and sufficient sleep at night, his weight drops. After consuming food during the day, his weight increases. The bed-time weight minus the early morning weight is the weight gain amount of that particular day.

The author would like to describe the essence of his developed “hybrid model” that combines both space-domain (SD) viscoelastic/viscoplastic VGT analysis method and the frequency-domain (FD) fast Fourier transform (FFT) analysis method. It is described in 9 steps instead of using mathematical equations to describe it. In this article, he has applied both the SD-VGT operations (steps 1-6) and the FD-FFT operations (steps 7-9). As a result, this is aimed at readers who do not have an extensive background in the academic subjects of engineering, physics, and mathematics - several excerpts from Wikipedia are included in the Method section of this full-text article.

The first step is to collect the output data or symptom (strain or  $\epsilon$ ) on a time scale. The second step is to calculate the output change rate with time ( $d\epsilon/dt$ ), i.e. the change rate of strain or symptom over each period. The third step is to gather the input data or cause (viscosity or  $\eta$ ) on a time scale. The fourth step is to calculate the time-dependent input or cause (time-dependent stress or  $\sigma$ ) by multiplying  $d\epsilon/dt$  and  $\eta$  together. The “time-dependent input or cause equation” of “stress  $\sigma = \text{strain change rate of } d\epsilon/dt * \text{viscosity } \eta$ ” is the essential part of “time-dependency”. The fifth step is to plot the input-output (i.e. stress-strain or cause-symptom) curve in a 2-dimensional space domain or SD (x-axis versus y-axis) with strain (output or symptom) on the x-axis and stresses (time-dependent inputs, causes, or stresses) on the y-axis. The sixth step is to calculate the total enclosed area within these stress-strain curves or input-output curves (i.e. the hysteresis loops), which is also an indicator of associated energies (either created energy or dissipated energy) of this input and output dataset. These energy values can also be considered as the degrees of influence on output by inputs.

The seventh step is to define a “hybrid input variable” by either using “strain\*stress” which yields a more accurate estimation of energy similar to the SD-VGT energy associated with the hysteresis loop or using “strain\*viscosity” which yields a less accurate estimation of energy. The eighth step is to present these hybrid models’ results of both (strain\*stress) and (strain\*viscosity) in TD and then perform the FFT operation to convert them into FD. The enclosed area of the FD curve (where the x-axis is the frequency and the y-axis is the amplitude of energy) can be used to estimate the total FD-FFT energy. The ninth step is to compare these two hybrid model results by using both “strain\*stress” and “strain\*viscosity” in FD against the VGT results in SD.

After providing the above 9-step description, the author utilized the following set of VGT stress-strain mathematical equations in a 2-dimensional SD to address the unique “time-dependency characteristics” of selected medical variables:

#### Strain

=  $\epsilon$

= individual strain value at the present time duration

#### Stress

=  $\sigma$  (based on the change rate of strain multiplying with a chosen viscosity factor  $\eta$ )

=  $\eta * (d\epsilon/dt)$

=  $\eta * (d\text{-strain}/d\text{-time})$

= (viscosity factor  $\eta$  using individual viscosity factor at present time duration) \* (strain at present quarter - strain at previous time duration)

Some of these inputs (causes or viscosity factors) are further normalized by dividing them by the average number of viscosity or a certain established health standard, such as 1.0 for metabolism index where  $m_i$ ,  $i=1,4$  for medical conditions and  $i=5,10$  for lifestyle details since  $m_i$  values have already been normalized in their original calculations. Other examples of normalization factors are 6.0 for HbA1C, 30 for ACR, 2 wake-up times as the acceptable limit for wakeup times for urination at night, 120 mg/dL for glucose, 25 for body mass index (BMI), 4,000 steps after each meal, 15 grams of carbs/sugar intake amount per meal, 50% as a “break-even” risk level of medical complications, etc. If using the originally collected data, i.e. the non-normalized data would distort the numerical comparison of the hysteresis loop areas. Using the “normalization process”, he can remove the dependency of the individual unit or certain unique characteristics associated with each viscosity factor. This process allows him to convert the originally collected variables into a set of “dimensionless variables” for easier numerical comparison and result interpretation.

#### Specific Medical Information

##### The Author’s Diabetes Case

The author has been a severe T2D patient since 1996. He weighed 220 lb. (100 kg, BMI 32.5) at that time. By 2010, he still weighed 198 lb. (BMI 29.2) with average daily glucose of 250 mg/dL (HbA1C of 10%). During that year, his triglycerides reached 1161 and albumin-creatinine ratio (ACR) at 116. He also suffered from five cardiac episodes within a decade. In 2010, three independent physicians warned him regarding his need for kidney dialysis treatment and his future high risk of dying from his severe diabetic complications. Other than the cerebrovascular disease (stroke), he has suffered most of the known diabetic complications, including both macro-vascular and micro-vascular complications.

In 2010, he decided to launch his self-study on endocrinology, diabetes, and food nutrition to save his own life. During 2015 and 2016, he developed four prediction models related to diabetes conditions: weight, PPG, fasting plasma glucose (FPG), and A1C. As a result, from using his developed mathematical metabolism index (MI) model in 2014 and the four prediction tools, by end of 2016, his weight was reduced from 220 lbs. (100 kg, BMI 32.5) to 176 lbs. (89 kg, BMI 26.0), waistline from 44 inches (112 cm) to 33 inches (84 cm), average finger glucose reading from 250 mg/dL to 120 mg/dL, and lab-tested A1C from 10% to ~6.5%. One of his major accomplishments is that he no longer takes any diabetes medications as of 12/8/2015.

In 2017, he has achieved excellent results on all fronts, especially glucose control. However, during the pre-COVID period of 2018 and 2019, he traveled to approximately 50+ international cities to attend 65+ medical conferences and made ~120 oral

presentations. This hectic schedule inflicted damage to his diabetes control, through dining out frequently, post-meal exercise disruption, jet lag, and along with the overall metabolic impact due to his irregular life patterns through a busy travel schedule; therefore, his glucose control and overall metabolism state were somewhat affected during this two-year heavier traveling period.

Since 2020, living in a COVID-19 quarantined lifestyle, not only has he published 400+ medical papers in 100+ journals, but he has also reached his best health conditions in the past 26 years. By the beginning of 2022, his weight was further reduced to **168 lbs. (BMI 24.8) along with a 5.8% A1C value (beginning level of pre-diabetes)**, without having any medication interventions or insulin injections. These good results are due to his non-traveling, low-stress, and regular daily life routines. Of course, his knowledge of chronic diseases, practical lifestyle management experiences, and development of various high-tech tools contribute to his excellent health status since 1/19/2020, the beginning date of his self-quarantined life.

On 5/5/2018, he applied a continuous glucose monitoring (CGM) sensor device on his upper arm and checks his glucose measurements every 5 minutes for a total of ~288 times each day. He has maintained the same measurement pattern to the present day. In his research work, he uses his CGM sensor glucose at a time interval of 15 minutes (96 data per day). Incidentally, the difference in average sensor glucoses between 5-minute intervals and 15-minute intervals is only 0.7% (*average glucose of 112.15 mg/dL for 5 minutes and average glucose of 111.33 mg/dL for 15-minutes with a correlation of 96% between these two sensor glucose curves*) during the period from 2/19/20- to 5/9/22.

Therefore, over the past 13 years, he could study and analyze the collected ~3 million data regarding his health status, medical conditions, and lifestyle details. He applies his knowledge, models, and tools from mathematics, physics, engineering, and computer science to conduct his medical research work. His research is based on the aims of achieving both “high precision” with “quantitative proof” in the medical findings.

The following timetable provides a rough sketch of the emphasis in his medical research during each stage:

- 2000-2013: Self-study diabetes and food nutrition, developing a data collection and analysis software.
- 2014: Develop a mathematical model of metabolism, using engineering modeling and advanced mathematics.
- 2015: Weight & FPG prediction models, using neuroscience.
- 2016: PPG & HbA1C prediction models, using optical physics, artificial intelligence (AI), and neuroscience.
- 2017: Complications due to macro-vascular research, such as Cardiovascular disease (CVD), coronary heart diseases (CHD), and stroke, using pattern analysis and segmentation analysis.
- 2018: Complications due to micro-vascular research such as kidney (CKD), bladder, foot, and eye issues (DR).
- 2019: CGM big data analysis, using wave theory, energy theory, frequency domain analysis, quantum mechanics, and AI.
- 2020: Cancer, dementia, longevity, geriatrics, DR, hypothyroidism, diabetic foot, diabetic fungal infection, and linkage between metabolism and immunity, learning about certain infectious diseases, such as COVID-19.
- 2021: Applications of linear elastic glucose theory (LEGT) and perturbation theory from quantum mechanics on medical research subjects, such as chronic diseases and their complications, cancer, and dementia.

- 2022: Applications of viscoelastic/viscoplastic glucose theory (LEGT) on 92 biomedical research cases and 4 economics research cases.

Again, to date, he has spent around 40,000 hours self-studying and researching medicine. He has collected and calculated more than three million pieces of data regarding his medical conditions and lifestyle details. In addition, he has written nearly 700 medical research notes and published 600+ papers in 100+ various medical and engineering journals. Moreover, he has also given ~120 presentations at ~65 international medical conferences. He has continuously dedicated his time (11-12 hours per day and work each day of a year, without rest) and efforts to his medical research work and shared his findings and learnings with other patients worldwide.

## Method

### MPM Background

To learn more about his developed GH-Method: math-physical medicine or MPM methodology, readers can select the following three articles from the 400+ published medical papers.

The first paper, No. 386, describes his MPM methodology in a general conceptual format. The second paper, No. 387, outlines the history of his personalized diabetes research, various application tools, and the differences between the biochemical medicine (BCM) approach versus the MPM approach. The third paper, No. 397, depicts a general flow diagram containing ~10 key MPM research methods and different tools.

All of the listed papers in the Reference section are his written and published medical research papers.

### *Elasticity, Plasticity, Viscoelasticity, and Viscoplasticity (LEGT & VGT)*

#### **The Difference Between Elastic Materials and Viscoelastic Materials**

*(from “Soborthans, innovating shock and vibration solutions”)*

#### **What are Elastic Materials?**

Elasticity is the tendency of solid materials to return to their original shape after forces are applied to them. When the forces are removed, the object will return to its initial shape and size if the material is elastic.

**Medical Analogy:** *The medical counterpart is “when cause or risk factors are reduced or removed, the symptoms of the certain disease would be improved or ceased”.*

#### **What are Viscous Materials?**

Viscosity is a measure of a fluid’s resistance to flow. A fluid with large viscosity resists motion. A fluid with low viscosity flows. For example, water flows more easily than syrup because it has a lower viscosity. High viscosity materials might include honey, syrups, or gels – generally, things that resist flow. Water is a low viscosity material, as it flows readily. Viscous materials are thick or sticky or adhesive. Since heating reduces viscosity, these materials don’t flow easily. For example, warm syrup flows more easily than cold.

## What is Viscoelastic?

Viscoelasticity is the property of materials that exhibit both viscous and elastic characteristics when undergoing deformation. Synthetic polymers, wood, and human tissue, as well as metals at high temperatures, display significant viscoelastic effects. In some applications, even a small viscoelastic response can be significant.

**Medical Analogy:** Viscoelastic behavior means the material has "time-dependent" characters. Biomedical data, i.e. biomarkers, are time-dependent due to body cells being organic which changes with time constantly.

## Elastic Behavior Versus Viscoelastic Behavior

The difference between elastic materials and viscoelastic materials is that viscoelastic materials have a viscosity factor and elastic ones don't. **Because viscoelastic materials have the viscosity factor, they have a strain rate dependent on time.** Purely elastic materials do not dissipate energy (heat) when a load is applied, then removed; however, a viscoelastic substance does.

**Medical Analogy:** Most of the biomarkers display time-dependency, therefore they have both change-rate of time and viscosity factor behaviors. Viscoelastic biomarkers do dissipate energy when a causing force is applied to it.

The following brief introductions are excerpts from Wikipedia:

## "Elasticity (Physics)

Physical property is when materials or objects return to their original shape after deformation.

In physics and materials science, **elasticity** is the ability of a body to resist a distorting influence and to return to its original size and shape when that influence or force is removed. Solid objects will deform when adequate loads are applied to them; if the material is elastic, the object will return to its initial shape and size after removal. This is in contrast to plasticity, in which the object fails to do so and instead remains in its deformed state. Hooke's law states that the force required to deform elastic objects should be directly proportional to the distance of deformation, regardless of how large that distance becomes. This is known as perfect elasticity, in which a given object will return to its original shape no matter how strongly it is deformed. This is an ideal concept only; most materials that possess elasticity in practice remain purely elastic only up to very small deformations, after which plastic (permanent) deformation occurs.

In engineering, the elasticity of a material is quantified by the elastic modulus such as Young's modulus, bulk modulus, or shear modulus which measure the amount of stress needed to achieve a unit of strain; a higher modulus indicates that the material is harder to deform. The material's elastic limit or yield strength is the maximum stress that can arise before the onset of plastic deformation.


**Medical Analogy:** The elastic behavior analogy in medicine can be expressed by the metal rod analogy for the postprandial plasma glucose (PPG). Consuming carbohydrates and/or sugar

acts like a tensile force to stretch a metal rod longer; while post-meal exercise acts like a compressive force to suppress a metal rod shorter. If lacking food consumption and exercise, the metal rod (analogy of PPG) will remain in its original length, similar to a non-diabetes person or less-severed type 2 diabetes (T2D) patient.

## Plasticity (Physics)


Deformation of a solid material undergoing non-reversible changes of shape in response to applied forces.

In physics and materials science, **plasticity**, also known as **plastic deformation**, is the ability of a solid material to undergo permanent deformation, a non-reversible change of shape in response to applied forces. For example, a solid piece of metal being bent or pounded into a new shape displays plasticity as permanent changes occur within the material itself. In engineering, the transition from elastic behavior to plastic behavior is known as yielding. Plastic deformation is observed in most materials, particularly metals, soils, rocks, concrete, and foams.

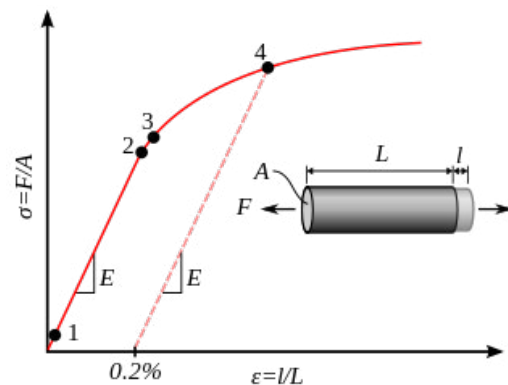

A stress-strain curve showing typical yield behavior for nonferrous alloys.

1. True elastic limit
2. Proportionality limit
3. Elastic limit
4. Offset yield strength

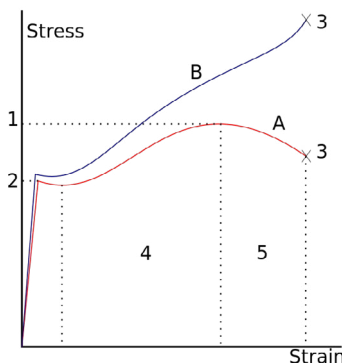

A stress strain is typical of structural steel.

- 1: Ultimate strength
- 2: Yield strength (yield point)
- 3: Rupture
- 4: Strain hardening region
- 5: Necking region
- A: Apparent stress (F/A0)
- B: Actual stress (F/A)

For many ductile metals, tensile loading applied to a sample will cause it to behave in an elastic manner. Each increment of the load is accompanied by a proportional increment in extension. When the load is removed, the piece returns to its original size. However, once the load exceeds a threshold – the yield strength – the extension increases more rapidly than in the elastic region; now when the load is removed, some degree of the extension will remain.

**Medical Analogy:** A plastic behavior analogy in medicine is the PPG level of a severe T2D patient. Even consuming a smaller amount of carbs/sugar, the patient's PPG will rise sharply which cannot be brought down to a healthy level of PPG even with a significant amount of exercise. This means that the PPG level has exceeded its "elastic limit" and entered into a "plastic range".

### Viscoelasticity

Property of materials with both viscous and elastic characteristics under deformation.

In materials science and continuum mechanics, viscoelasticity is the property of materials that exhibit both viscous and elastic characteristics when undergoing deformation. Viscous materials, like water, resist shear flow and strain linearly with time when a stress is applied. Elastic materials strain when stretched and immediately return to their original state once the stress is removed.

Viscoelastic materials have elements of both of these properties and, as such, exhibit time-dependent strain. Whereas elasticity is usually the result of bond stretching along crystallographic planes in an ordered solid, viscosity is the result of the diffusion of atoms or molecules inside an amorphous material.

In the nineteenth century, physicists such as Maxwell, Boltzmann, and Kelvin researched and experimented with the creep and recovery of glasses, metals, and rubbers. Viscoelasticity was further examined in the late twentieth century when synthetic polymers were engineered and used in a variety of applications. Viscoelasticity calculations depend heavily on the viscosity variable,  $\eta$ . The inverse of  $\eta$  is also known as fluidity,  $\phi$ . The value of either can be derived as a function of temperature or as a given value (i.e. for a dashpot).


Depending on the change of strain rate versus stress inside a material, the viscosity can be categorized as having a linear, non-linear, or plastic response. In addition, when the stress is independent of this strain rate, the material exhibits plastic deformation. Many viscoelastic materials exhibit rubber-like behaviors explained by the thermodynamic theory of polymer elasticity.

Cracking occurs when the strain is applied quickly and outside of the elastic limit. Ligaments and tendons are viscoelastic, so the extent of the potential damage to them depends both on the rate of the change of their length as well as on the force applied.

**A Viscoelastic Material has the Following Properties:**

- hysteresis is seen in the stress-strain
- stress relaxation occurs: step constant strain causes decreasing stress
- creep occurs: step constant stress causes increasing strain
- its stiffness depends on the strain rate or the stress rate.

**Elastic versus viscoelastic behavior:**

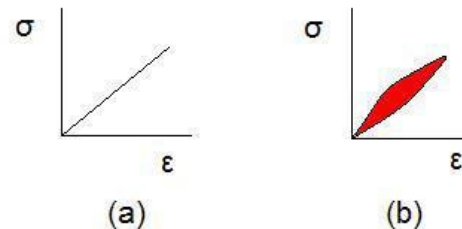

Stress-strain curves for a purely elastic material (a) and a viscoelastic material (b). The red area is a hysteresis loop and shows the amount of energy lost (as heat) in a loading and unloading cycle. It is equal to  $\oint \sigma d\epsilon$  where  $\sigma$  is stress and  $\epsilon$  is strain. In other words, the hysteresis loop area represents the amount of energy during the loading and unloading process.

Unlike purely elastic substances, a viscoelastic substance has an elastic component and a viscous component. The viscosity of a viscoelastic substance gives the substance a strain rate dependence on time. Purely elastic materials do not dissipate energy (heat) when a load is applied, then removed. However, a viscoelastic substance dissipates energy when a load is applied, then removed. Hysteresis is observed in the stress-strain curve, with the area of the loop being equal to the energy lost during the loading cycle. Since viscosity is the resistance to thermally activated plastic deformation, a viscous material will lose energy through a loading cycle. Plastic deformation results in lost energy, which is uncharacteristic of a purely elastic material's reaction to a loading cycle.

### Viscoplasticity

Viscoplasticity is a theory in continuum mechanics that describes the rate-dependent inelastic behavior of solids. Rate-dependence in this context means that the deformation of the material depends on the rate at which loads are applied. The inelastic behavior that is the subject of viscoplasticity is plastic deformation which means that the material undergoes unrecoverable deformations when a load level is reached. Rate-dependent plasticity is important for transient plasticity calculations. The main difference between rate-independent plastic and viscoplastic material models is that the latter exhibit not only permanent deformations after the application of loads but continue to undergo a creep flow as a function of time under the influence of the applied load.

**Medical Analogy:** In viscoelastic or viscoplastic analysis, the stress component equals the strain change rate of time multiplying with the viscosity factor, or:

**Stress ( $\sigma$ )**

= strain ( $\epsilon$ ) change rate \* viscosity factor ( $\eta$ )

=  $d\epsilon/dt * \eta$


**The hysteresis loop area**

= the integrated area of stress ( $\sigma$ ) and strain ( $\epsilon$ ) curve

=  $\oint \sigma d\epsilon$

### From Time-Domain to Frequency domain via Fourier Transform

In physics, electronics, control systems engineering, and statistics, the frequency domain refers to the analysis of mathematical functions or signals concerning frequency, rather than time.[1] Put simply, a time-domain graph shows how a signal changes over time, whereas a frequency-domain graph shows how much of the signal lies within each given frequency band over a range of frequencies. A frequency-domain representation can also include information on the phase shift that must be applied to each sinusoid to be able to recombine the frequency components to recover the original time signal.

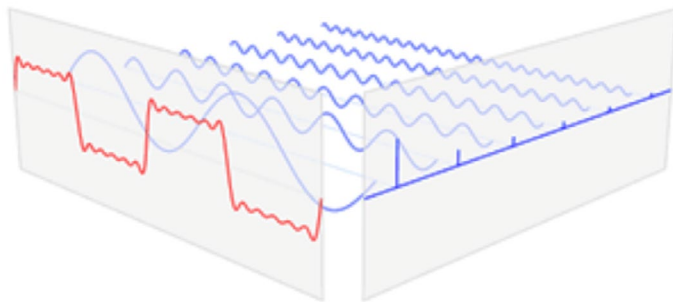

The Fourier transform converts the function's time-domain representation, shown in red, to the function's frequency-domain representation, shown in blue. The component frequencies, spread across the frequency spectrum, are represented as peaks in the frequency domain.

A given function or signal can be converted between the time and frequency domains with a pair of mathematical operators called transforms. An example is the Fourier transform, which converts a time function into a complex-valued sum or integral of sine waves of different frequencies, with amplitudes and phases, each of which represents a frequency component. The "spectrum" of frequency components is the frequency-domain representation of the signal. The inverse Fourier transform converts the frequency-domain function back to the time-domain function. A spectrum analyzer is a tool commonly used to visualize electronic signals in the frequency domain.

### Advantages

One of the main reasons for using a frequency-domain representation of a problem is to simplify the mathematical analysis. For mathematical systems governed by linear differential equations, a very important class of systems with many real-world applications, converting the description of the system from the time domain to a frequency domain converts the differential equations to algebraic equations, which are much easier to solve.

In addition, looking at a system from the point of view of frequency can often give an intuitive understanding of the qualitative behavior of the system, and a revealing scientific nomenclature has grown up to describe it, characterizing the behavior of physical systems to time-varying inputs using terms such as bandwidth, frequency response, gain, phase shift, resonant frequencies, time constant, resonance width, damping factor, Q factor, harmonics, spectrum, power spectral density, eigenvalues, poles, and zeros.

An example of a field in which frequency-domain analysis gives a better understanding than the time domain is music; the theory of operation of musical instruments and the musical notation used to record and discuss pieces of music is implicitly based on the breaking down of complex sounds into their separate component frequencies (musical notes).

### Magnitude and Phase

In using the Laplace, Z-, or Fourier transforms, a signal is described by a complex function of frequency: the component of the signal at any given frequency is given by a complex number. The modulus of the number is the amplitude of that component, and the argument is the relative phase of the wave. For example, using the Fourier transform, a sound wave, such as human speech, can be broken down into its component tones of different frequencies, each represented by a sine wave of different amplitude and phase. The response of a system, as a function of frequency, can also be described by a complex function. In many applications, phase information is not important. By discarding the phase information, it is possible to simplify the information in a frequency-domain representation to generate a frequency spectrum or spectral density. A spectrum analyzer is a device that displays the spectrum, while the time-domain signal can be seen on an oscilloscope.

### Types

Although "the" frequency domain is spoken of in the singular, there are several different mathematical transforms that are used to analyze time-domain functions and are referred to as "frequency domain" methods. These are the most common transforms and the fields in which they are used:

- Fourier series – periodic signals, oscillating systems.
- Fourier transform – aperiodic signals, transients.
- Laplace transform – electronic circuits and control systems.
- Z transform – discrete-time signals, digital signal processing.
- Wavelet transform — image analysis, data compression.

More generally, one can speak of the transform domain concerning any transform. The above transforms can be interpreted as capturing some form of frequency, and hence the transform domain is referred to as a frequency domain.

### Discrete Frequency Domain

The Fourier transform of a periodic signal has energy only at a base frequency and its harmonics. Another way of saying this is that a periodic signal can be analyzed using a discrete frequency domain. Dually, a discrete-time signal gives rise to a periodic frequency spectrum. Combining these two, if we start with a time signal which is both discrete and periodic, we get a frequency spectrum that is also both discrete and periodic. This is

the usual context for a discrete Fourier transform.

1960s, with "frequency domain" appearing in 1953. See time domain: the origin of the term for details.

### History of Term

The use of the terms "frequency domain" and "time domain" arose in communication engineering in the 1950s and early

### Results

Figure 1 shows the TD-correlation analysis results.

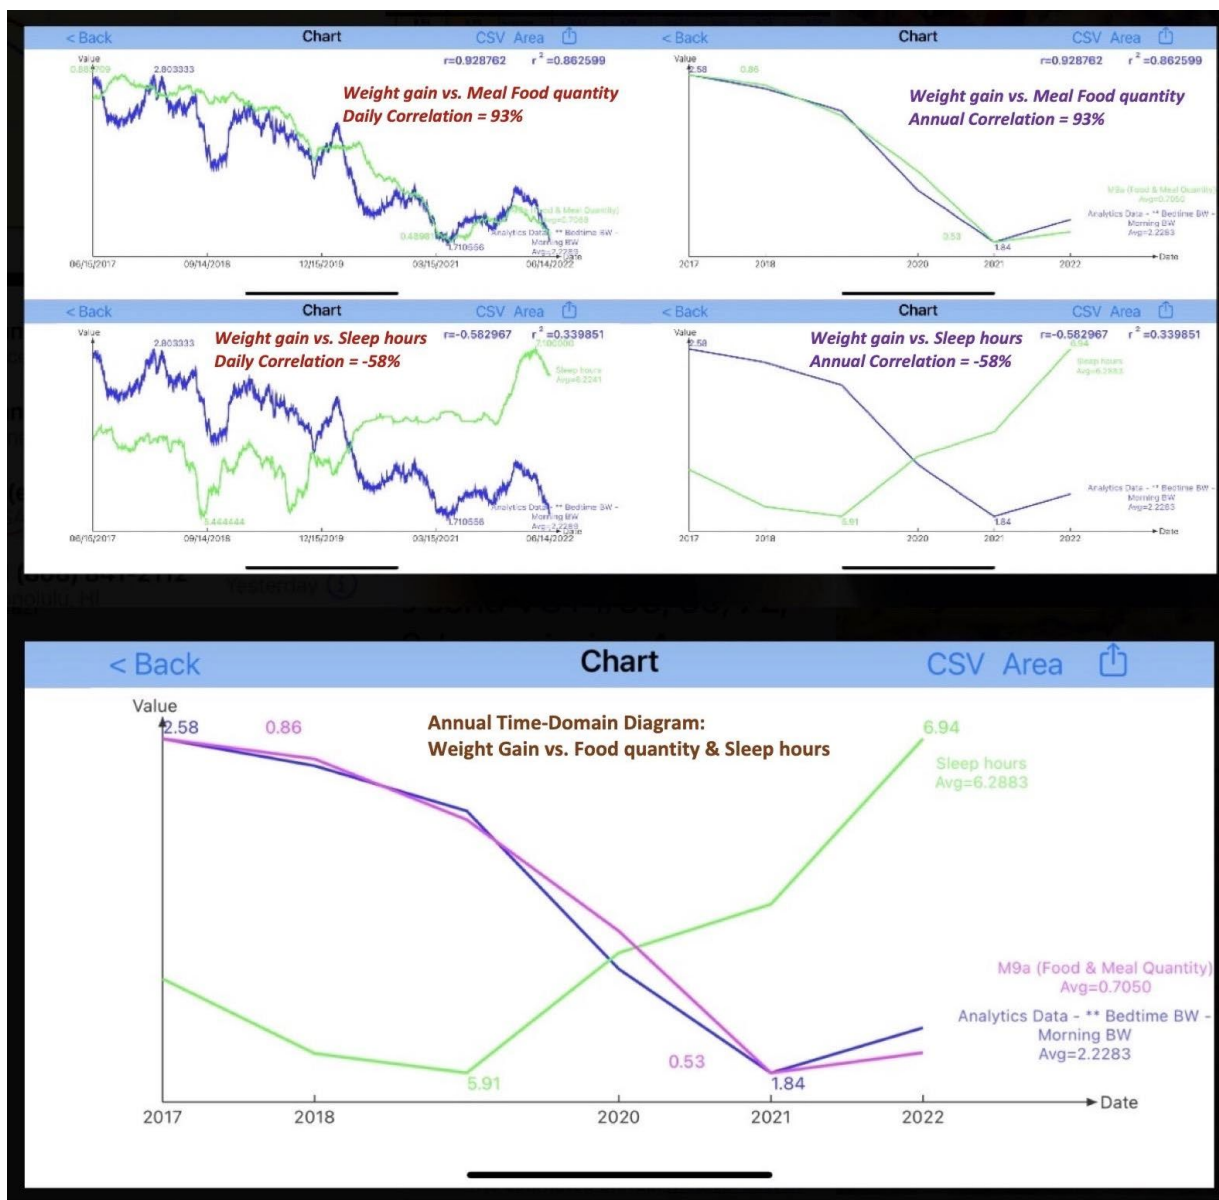


Figure 1: TD-correlation analysis results

Figure 2 displays the SD-VGT analysis results.

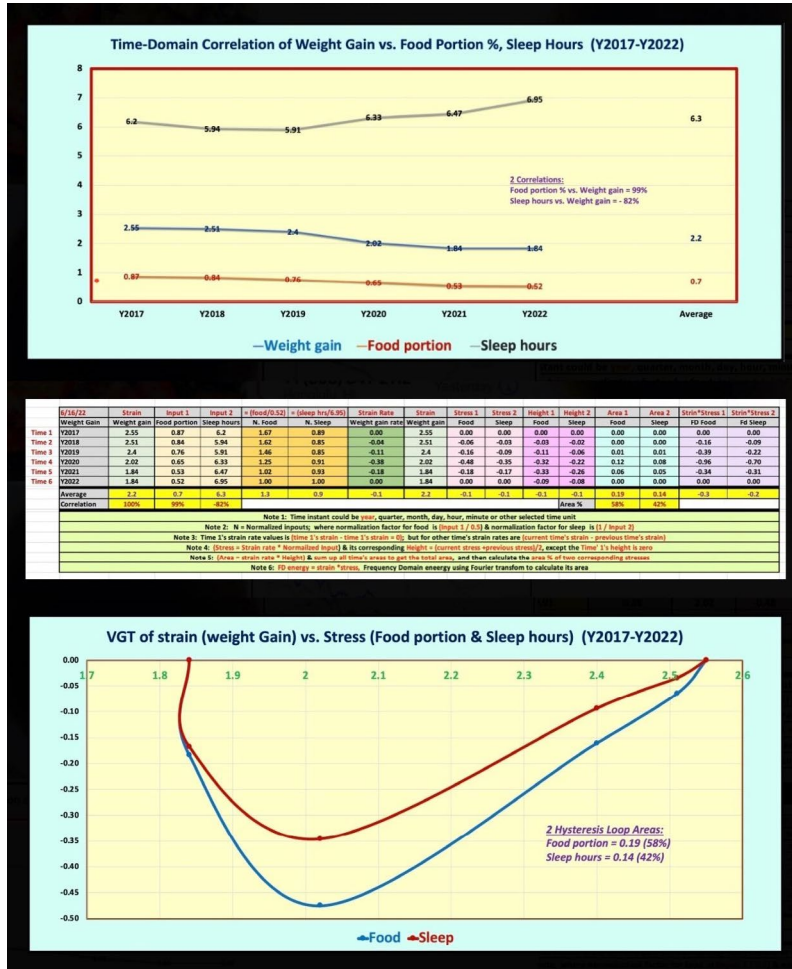


Figure 2: SD-VGT analysis results

Figure 3 illustrates FD-FFT analysis results.

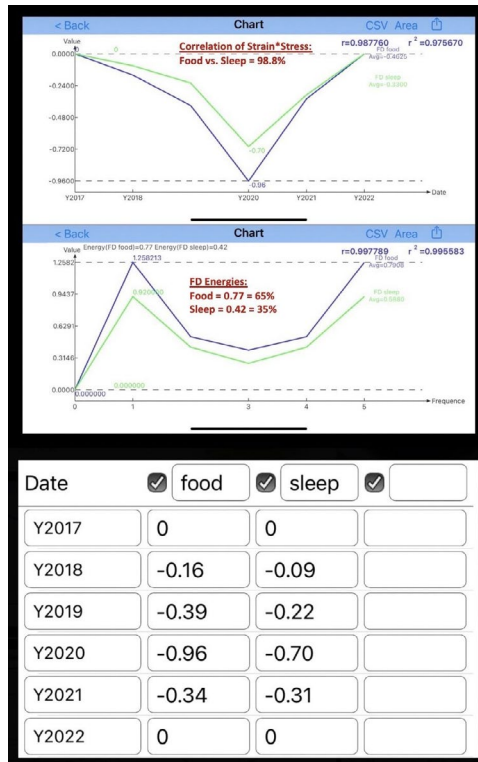


Figure 3: FD-FFT analysis results



## Conclusions

In summary, there are 3 observations from these TD-correlations, SD-VGT energy, and FD-FFT energy analyses for investigating body weight gain versus food portion (food) and sleep hours at night (sleep):

(1) From the 90-day daily moving average and annualized curves, the author observed that his weight gain and food portion curves are trending downward with 93% correlation vs. body weight gain, while his sleep hours curve trending upward with -58% correlation vs. a body weight gain. ***This observation matched the general healthcare knowledge of having sufficient and sound sleep at night while eating lesser food amounts with nutritional well-balanced meals during the day.***

(2) *Researching the variation of strain and stress from the stress-strain diagram of the VGT results, it can be seen that both food and sleep have similar waveform patterns due to using the same strain change rate, i.e. body weight gain change rate. **The energy contribution % from these 2 inputs are: Food = 0.19 (58%) and Sleep = 0.14 (42%).***

(3) *From the frequency-domain analysis results, these two variables of (body weight gain change\*stress of food) & (body weight gain change\*stress of sleep) have an extremely high correlation of 98.8%. After conducting the fast Fourier transform operation, the total energies in the frequency domain, i.e. two calculated areas underneath the respective curve of frequency versus amplitude of energy, are: **Food energy = 0.77 (65%) and Sleep energy = 0.42 (35%). This frequency-domain energy ratio of 65%: 35% is comparable with the space-domain VGT analysis result of 58%: 42%.***

This study explains the relationship between body weight gain vs. the influence of food portions during the day and sleep hours at night using the past 5-years' collected data from 6/15/2017 to 6/14/2022. ***The quantitative findings from this paper have matched the general healthcare requirements of "eating less and sleeping well"***. The SD-VGT energy tool adopted from engineering and the FD-FFT energy tool adopted from physics have further provided some useful hints and realistic interpre-

tations of complex biomedical results from weight changes resulting from food consumption and sleep quality. Body weight maintenance is not a simple task because it is equally as difficult and probably more important than glucose control. Both weight and glucose require a deeper understanding of the complex biomedical phenomena. It has further proven that the energy ratios between food versus sleep on weight gain are comparable to each other regardless of the analysis method used, whether the space-domain approach or frequency-domain approach.

## References

For editing purposes, the majority of the references in this paper, which are self-references, have been removed. Only references from other authors' published sources remain. The bibliography of the author's original self-references can be viewed at [www.eclaircmd.com](http://www.eclaircmd.com).

Readers may use this article as long as the work is properly cited, their use is educational and not for profit, and the author's original work is not altered.

To read additional published VGT analyses on medical research, please view them in the following three journals:

- (1) Series of Endocrinology, Diabetes, and Metabolism (contact: Patrick Robinson).
- (2) Journal of Applied Material Science & Engineering Research (contact: Catherine).
- (3) Advances in Bioengineering and Biomedical Science Research (contact: Sonny Hazi).

**Copyright:** ©2022 Gerald C. Hsu. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.